



K+ SERIES: DSK-3S Triple Deck Steamer

Project: _____ Item: _____



DSK-3S




Standard Features:

- AISI Grade Stainless Steel
- Energy efficient heat exchange system
- Insulated heat exchange chamber
- 90MJ Two jet burner system
- Flame failure device and auto ignition incorporated
- Auto refill system and pressure release valve installed
- Three stop rotary door lock system
- 65L main tank capacity, 10L refill tank capacity
- Front access to all components makes service easy
- XSENTIAL XC8000 Water filtration included
- Bottom cabinet internal dimension - 380mm L x 600mm D x 400mm H
- Top cabinet internal dimension - 380mm L x 600mm D x 200mm H

Options:

- NG/LPG - Available in Natural or LP Gas

Specifications:

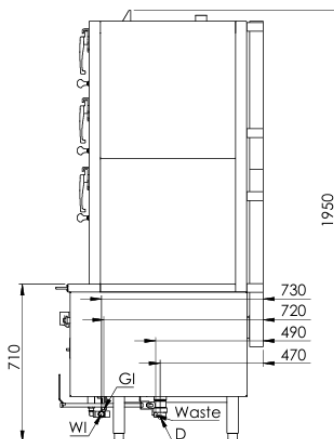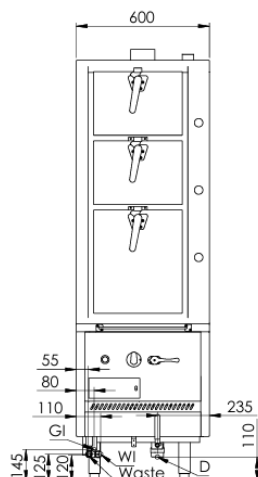

MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	NET WEIGHT (kg)	GAS CONSUMPTION (MJ/h)	
					NG	LPG
DSK-3S	600	885 (Body) 940 (w/Rail)	1950	200	90	90

Connections:

GAS (GI) (BSP)	WATER (WI) (BSP)	WASTE (BSP)	TANK DRAIN (D) (BSP)	SUPPLY PRESSURE (kPa)	
				NG	LPG
3/4" (M)	Non-return isolating valve – 15mm (F)	2" (M)	2" (F)	1.0	2.6

- Gas regulator is supplied within the unit
- The unit must be installed by an authorised installer in accordance to **AS/NZS5601 refer to current version**
- Warranty will be **voided** if a water filtration device is not installed

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

Approval Number: GMK 10677



B+S Commercial Kitchens
57 Plateau Road Reservoir VIC 3073 Australia | +61 3 9469 4754
info@bscommercialkitchens.com | www.bscommercialkitchens.com

