



K+ SERIES: KBT-SB4-CBR6-BM

Combination Four Open Burners & 600mm Char Broiler Bench Mounted

Project: _____ Item: ____



Standard Features:


- AISI grade stainless steel
- Heavy duty complete stainless steel frame
- 30MJ removable two-piece open cooktop burner (BT)
- 34MJ stainless steel U-Burner per 300mm section (CBR)
- Heavy duty cast iron J-Grates & Radiant Hoods
- Reversible J-Grates allow for an inclined or flat cooking surface
- Flame failure device included as standard
- Piezo ignition to pilot char broiler burner
- Multi-setting gas valve allows greater regulation of flame settings
- Easy access to all components for servicing and adjustments
- · Easy to clean fat spillage trays and rear splashback heat deflector


50

Options:

- NG/LPG Available in Natural or LP Gas
- PLT Pilot light per burner
- SPB Spillage Bowl

Specifications:

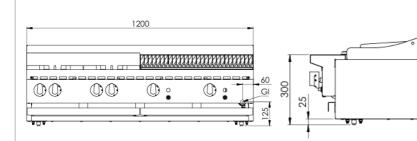



MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	NET WEIGHT (kg)	GAS CONSUMPTION (MJ/h)	
WODEL					NG	LPG
KBT-SB4-CBR6-BM	1200	840	425	160	188	160

Connections:

GAS (GI)	SUPPLY PRESSURE (kPa)			
(BSP)	NG	LPG		
³ ⁄ ₄ " (M)	1.0	2.6		

- · Gas regulator is supplied with the unit
- The unit must be installed by an authorised installer in accordance to AS/NZS5601 refer to current version

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

Approval Number: GMK 10703





