



K+ SERIES: KBT-SB8-BM

Eight Burner Boiling Top Bench Mounted

Project: _____ Item: _____



KBT-SB8-BM



Standard Features:

- AISI grade stainless steel
- Heavy duty complete stainless steel frame
- 30MJ removable two-piece open cooktop burner
- Heavy duty cast iron boiling top trivets
- Flame failure device included as standard
- Multi-setting gas valve allows greater regulation of flame settings
- Easy access to all components for servicing and adjustments
- Easy to clean fat spillage trays and rear splashback heat deflectors

Options:

- NG/LPG - Available in Natural or LP Gas
- PLT - Pilot light - per burner
- SPB - Spillage Bowl

Specifications:

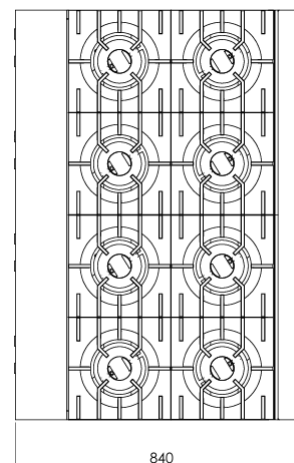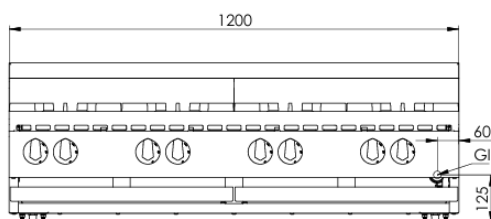

MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	NET WEIGHT (kg)	GAS CONSUMPTION (MJ/h)	
					NG	LPG
KBT-SB8-BM	1200	840	425	130	240	200

Connections:

GAS (GI) (BSP)	SUPPLY PRESSURE (kPa)	
	NG	LPG
3/4" (M)	1.0	2.6

- Gas regulator is supplied with the unit
- The unit must be installed by an authorised installer in accordance to **AS/NZS5601 refer to current version**

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

Approval Number: GMK 10703



B+S Commercial Kitchens
57 Plateau Road Reservoir VIC 3073 Australia | +61 3 9469 4754
info@bscommercialkitchens.com | www.bscommercialkitchens.com

