



K+ SERIES: KYCJSF-1HE

Single Hole Waterless Heat Exchange Steamer

Project: _____ Item: ____




Standard Features:

- AISI grade stainless steel
- Heavy duty complete stainless steel cabinet frame
- 87.5MJ 18-Jet Duck Bill Burner (DB)
- Robust heat exchange chamber 2mm thick
- Efficient omnidirectional conically perforated steam vent
- Overheat tank safety protection device fitted
- Automatic ball float refill mechanism allows for easy operation
- 37L water capacity
- 7-Hole perforated steaming plate
- Flame failure device included as standard
- Piezo ignition to pilot duck bill burner
- Front access to all components makes service easy

Options:

- NG/LPG Available in Natural or LP Gas
- CS Non-swivel rear castors Set of two

Specifications:

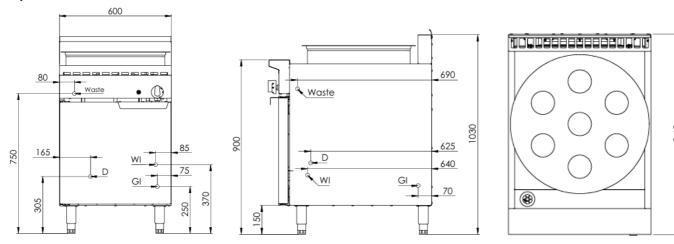

MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	NET WEIGHT (kg)	GAS CONSUMPTION (MJ/h)	
					NG	LPG
KYCJSF-1HE	600	840	1030	120	87.5	84

Connections:

GAS (GI)	WATER (WI) (BSP)	TANK DRAIN (D)	WASTE	SUPPLY PRESSURE (kPa)	
(BSP)		(BSP)	(BSP)	NG	LPG
³⁄₄" (M)	½" (F)	3⁄4" (F)	1-½" (M)	1.0	2.6

- Gas regulator is supplied within the unit
- The unit must be installed by an authorised installer in accordance to AS/NZS5601 refer to current version

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

Approval Number: GMK 10697





