

Project: \_\_\_\_\_ Item: \_\_\_\_\_



DLGB4N-C9D6


#### Standard Features:

- AISI grade stainless steel
- Heavy duty complete stainless steel cabinet frame
- 2.4kW Infrared cook zones with integrated high-performance wire plates
- One-piece machine pressed top surface - 1.5mm Thick
- Seamless microcrystalline glass plates - 300mm W x 300mm D x 6mm T
- Circular heating sections measuring 200mm Dia
- Infinitely variable power control knob to adjust heating levels
- Intuitive IPX5 rated display illustrates output power, cumulative energy consumption, malfunction codes and allows menu programming
- Internal cooling fans conserve working temperatures of all electronics
- Front access to all components makes service easy

#### Options:

- SCCP - Colored Control Panel
- SCCS - Non-swivel rear castors - Set of two
- SCPK - Plinth Kit

#### Specifications:

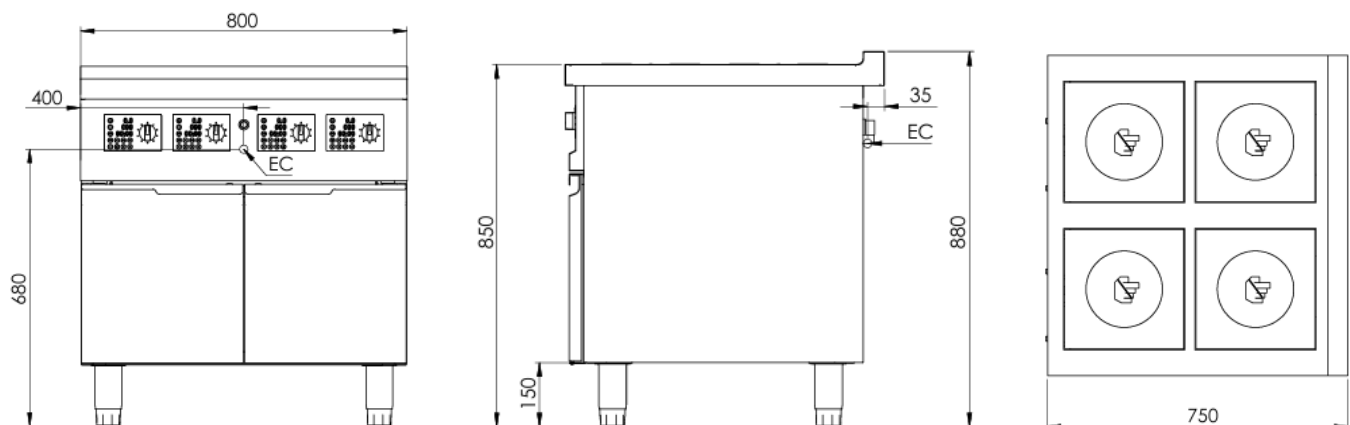

| MODEL       | LENGTH (mm) | DEPTH (mm) | HEIGHT (mm) | NET WEIGHT (kg) |
|-------------|-------------|------------|-------------|-----------------|
| DLGB4N-C9D6 | 800         | 750        | 880         | 60              |

#### Connections:

| ELECTRICAL CONNECTION (EC) | ELECTRICAL SUPPLY REQUIREMENTS |      |                |            |                     |
|----------------------------|--------------------------------|------|----------------|------------|---------------------|
|                            | VOLTAGE (V)                    | TYPE | FREQUENCY (Hz) | POWER (kW) | L1, L2, L3 AMPS (A) |
| Hard Wired                 | 415                            | 3P+E | 50/60          | 2.4*4      | 22                  |

- **Must** be installed by an authorised installer in accordance to **AS/NZS 3000** refer to current publications

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

Electromagnetic Compatibility: AS/NZS CISPR 14.1