



# K+ SERIES: KBT-GRP6-CBR3-BM

## Combination 600mm Grill Plate & 300mm Char Broiler Bench Mounted

Project: \_\_\_\_\_ Item: \_\_\_\_\_




#### Standard Features:


- AISI grade stainless steel
- Heavy duty complete stainless steel frame
- 22MJ aluminised tube burner per 300mm section (GRP)
- 34MJ stainless steel U-Burner per 300mm section (CBR)
- Heavy duty mild steel grill plate (16mm Thick)
- Top welded, smooth finish design
- Heavy duty cast iron J-Grates & Radiant Hoods (CBR)
- Reversible J-Grates allow for an inclined or flat cooking surface
- Flame failure device included as standard
- Piezo ignition to pilot grill plate and char broiler burner
- Multi-setting gas valve allows greater regulation of flame settings
- Easy access to all components for servicing and adjustments
- Easy to clean fat spillage trays and rear splashback heat deflector

#### **Options:**

• NG/LPG - Available in Natural or LP Gas

### **Specifications:**

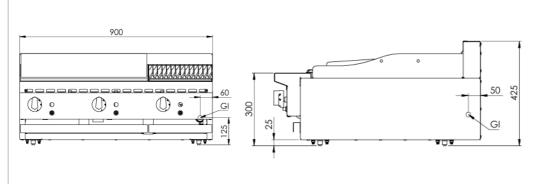



| MODEL            | LENGTH<br>(mm) | DEPTH<br>(mm) | HEIGHT<br>(mm) | NET WEIGHT<br>(kg) | GAS CONSUMPTION (MJ/h) |     |
|------------------|----------------|---------------|----------------|--------------------|------------------------|-----|
|                  |                |               |                |                    | NG                     | LPG |
| KBT-GRP6-CBR3-BM | 900            | 840           | 425            | 128                | 78                     | 74  |

#### **Connections:**

| GAS (GI) | SUPPLY PRESSURE (kPa) |     |  |  |
|----------|-----------------------|-----|--|--|
| (BSP)    | NG                    | LPG |  |  |
| 3⁄4" (M) | 1.0                   | 2.6 |  |  |

- Gas regulator is supplied with the unit
- The unit must be installed by an authorised installer in accordance to AS/NZS5601 refer to current version

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

**Approval Number: GMK 10703** 





