

K+ SERIES: KBT-SB4-GRP3-BM

Combination Four Open Burners & 300mm Grill Plate Bench Mounted

Project: _____ Item: __





Standard Features:

- AISI grade stainless steel
- Heavy duty complete stainless steel frame •
- 30MJ removable two-piece open cooktop burner (BT) •
- 22MJ aluminised tube burner per 300mm section (GRP) •
- Heavy duty cast iron boiling top trivets •
- Heavy duty mild steel grill plate (12mm Thick)
- Top welded, smooth finish design •
- Flame failure device included as standard •
- Piezo ignition to pilot grill plate burner
- Multi-setting gas valve allows greater regulation of flame settings
- Easy access to all components for servicing and adjustments
- Easy to clean fat spillage trays and rear splashback heat deflectors •

Options:

- NG/LPG Available in Natural or LP Gas
- PLT Pilot light per burner
- SPB Spillage Bowl

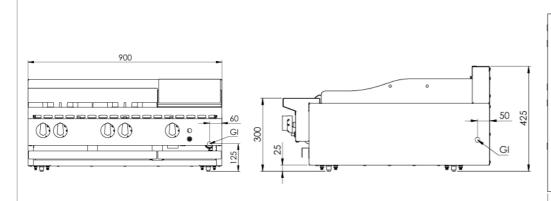



MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	NET WEIGHT (kg)	GAS CONSUMPTION (MJ/h)	
					NG	LPG
KBT-SB4-GRP3-BM	900	840	425	115	142	122

Connections:

GAS (GI)	SUPPLY PRESSURE (kPa)			
(BSP)	NG	LPG		
³ ⁄4" (M)	1.0	2.6		

Gas regulator is supplied with the unit

The unit must be installed by an authorised installer in accordance to AS/NZS5601 refer to current version

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

Approval Number: GMK 10703





